


Le sigle e la nomenclatura sono vicino ai raccordi nelle pagine ove sono illustrati
You can find nomenclature and part numbers near fittings illustrations

Come ordinare - How to order

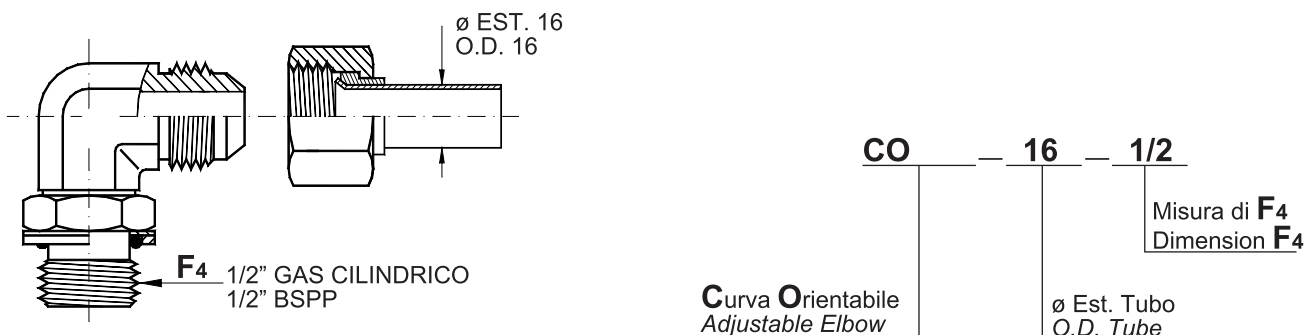

**NORMATIVE - MATERIALI
SPECIFICATIONS - MATERIALS**

NORMATIVA

Raccordi conformi a ISO 8434-2 e SAE J514 - Chiavi metriche

PROTEZIONI SUPERFICIALI

Zincati passivati Gialli Fe/Zn 12 c 2C
UNI ISO 2081- UNI ISO 4520
(vedi pagina 6 per ulteriori informazioni)

O-RING

NBR 82÷85 - 30°C +120°C
VITON^(*) V894-90 - 20°C +220°C

^(*) Marchio registrato da Dupont de Nemours

MATERIALI

Acciai al carbonio confacenti alle prestazioni richieste

Raccordi dritti	barre trafilate
Raccordi 90°, 45°, T e a croce	acciaio stampati a caldo
Raccordi a saldare	acciaio ad alta saldabilità
Componenti	barre trafilate
Dadi e bussole	acciaio stampato a freddo

SPECIFICATION

Fittings meet ISO 8434-2 and SAE J514 - Metric Wrench

INHIBITINGS

Zinc-plated yellow finished Fe/Zn 12 c 2C
UNI ISO 2081- UNI ISO 4520
(For further informations see page 6)

O-RING

NBR 82÷85 - 30°C +120°C
VITON^(*) V894-90 - 20°C +220°C

^(*) Registered trademark of Dupont de Nemours

MATERIALS

Carbon steel in according to the required performance

Straight fittings	bar stock
90°, 45°, T and cross fittings	press forged steel
Weld fittings	carbon steel
Components	bar stock
Nuts and sleeves	stamping steel